




TRJHT64PDP-BF  
FRONT VIEW @ 0°

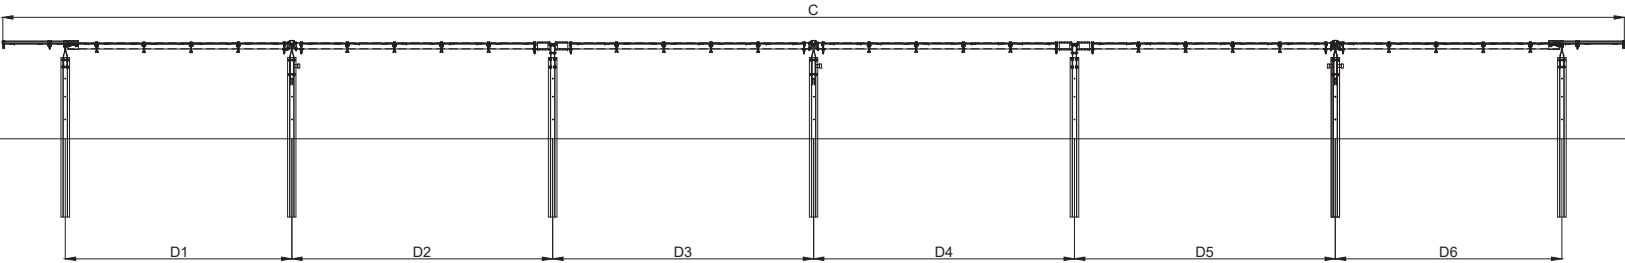


TRJHT64PDP-BF  
TOP VIEW @ 0°

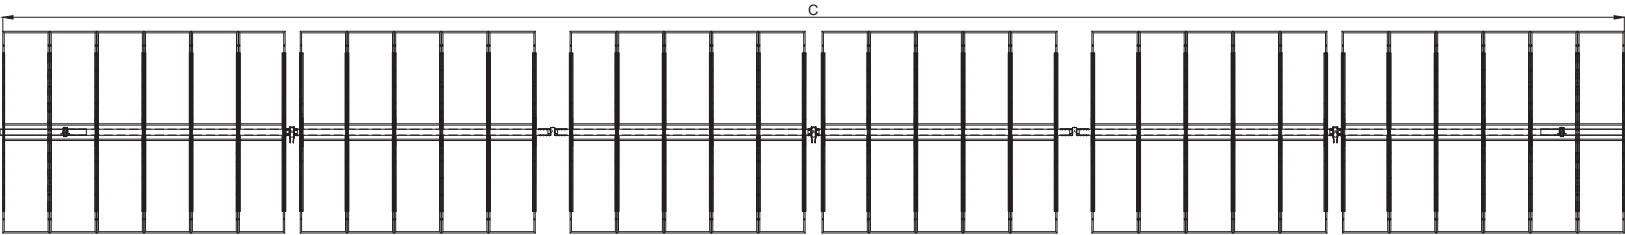


TRJHT64PDP-BF  
SIDE VIEW @ 55°

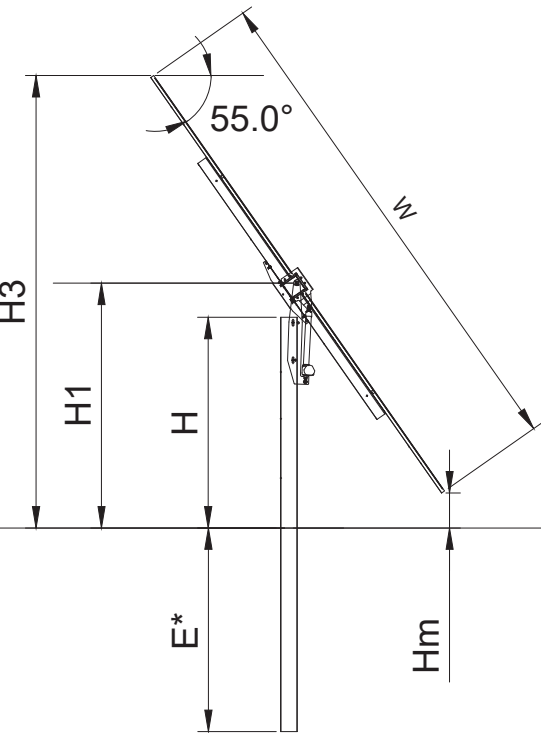

FOUNDATION TWIST ERROR RECOVERY

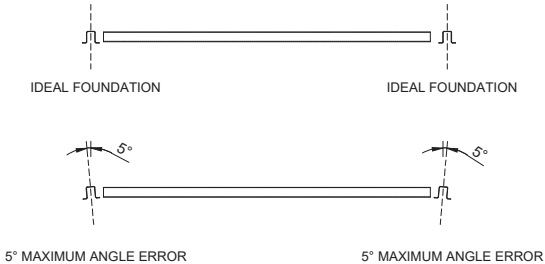


FOUNDATION ANGLE ERROR RECOVERY

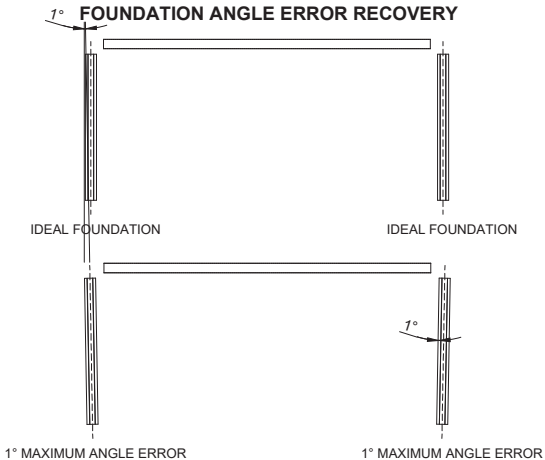

PRELIMINARY PV TABLES SPACING


NOMINAL VALUE - IT MAY CHANGE DUE TO MOUNTING TOLERANCES

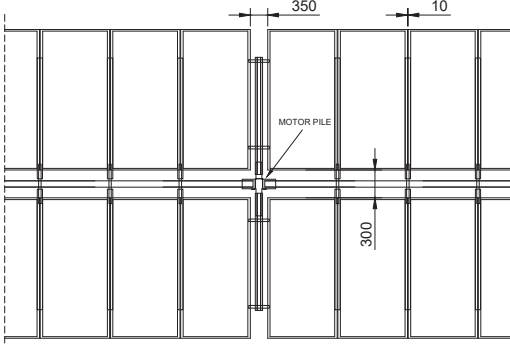

MATERIAL CHARACTERISTICS

- STEEL**  
Structural steel - at least S235JR - yield strength and thickness in accordance with structural calculations.
- SPHERICAL BEARINGS**  
Bronze / Stainless steel.
- SPACERS**  
Stainless Steel.
- SCREWS, NUTS and WASHERS**  
All steel parts will be galvanized according to environmental conditions of the site to have a design lifetime of 25 years
- GALVANIZATION**  
Basic Option:  
All steel parts will be galvanized according to environmental conditions of the site to have a design lifetime of 25 years

PHOTOVOLTAIC MODULE

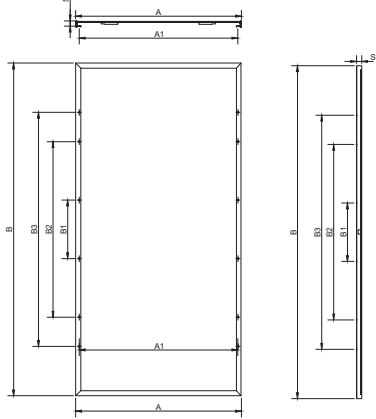

APPROXIMATE DIMENSIONS [mm]

A	1303	H	2155
A1	-	H1	2475
A2	-	H2	2505
B	2384	H3	4551
B1	400	Hm	500
B2	1400	W	5068
B3	-	D1/D6	6300
S	35	D2/D3	6600
C	43500	D4/D5	6600
E*	1800	-	-

\*Check with POT and Geotechnical report